


West

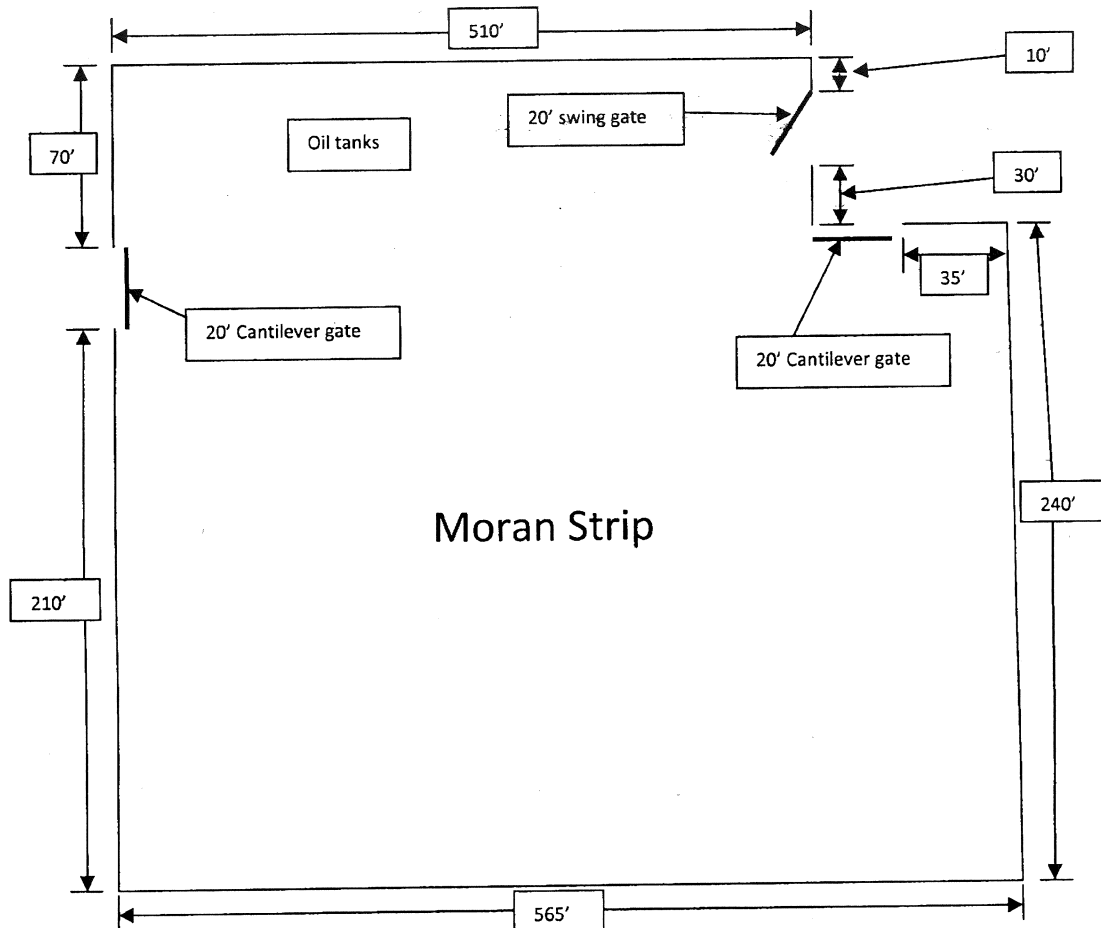

1670' of 6' high fence with 3 wire security top.

2-20' foot single Cantilever gates.

1-20' swing gate

Top wire

Location: Moran Strip

Land # R-4130-812

Fencing specs attached.

Chain link Fence Specifications

Fabric:	72" 9 GA. 2 OZ. Galvanized (2" Mesh) Chain Link Fabric
Line Post:	2 3/8" OD Full Length Pipe, 3.65 lbs per foot. Line posts set 10' on center maximum spacing. Concrete footing: 12" diameter, 36" depth.
Terminal Post:	4" OD Full Weight Pipe. Concrete footing: 12" diameter, 42" depth.
Bracing:	Terminal Posts braced and trussed to the nearest line post with 1-5/8" OD Full Weight Pipe and 3/8" truss rod & truss rod tightener.
Tension Wire:	7 Ga. Coil spring class III tension wire attached to the top and bottom of the fence fabric with 9 GA. Aluminum hog ring spaced 24" on center.
Barber Wire:	3 strands of 12 1/2 GA. 4 PT. class III barb wire on 45 degree pressed steel barb wire arm.
Fittings:	Regular brace band & carriage bolt, pressed steel rail-end, 45 degree pressed steel barb wire arm, pressed steel cap, 3/16" x 3/4 " tension bar, regular tension band & carriage bolts.
Tie Wire:	8-1/4" 9 GA. Aluminum Tie wire & Wire 6-1/2" 9 GA. Aluminum tie wire spaced 15" on center for line posts and 24" on center for rails.
Post Footings:	Truck Poured concrete.